


Our Lace up Cable Grips with Offset Eye are made from 2 strand galvanised wire with alloy ferrule to soft eye. Also available with copper or stainless steel ferrule, galvanised or stainless steel thimble, or two strand stainless steel construction.

These grips are of a flat construction. This allows the grip to be wrapped around the cable at any position then secured by a lace. Lace up cable grips can also be used in the central portion of a hauling job to load share with a tubular grip. **These grips are also available in double eye as pictured below.**

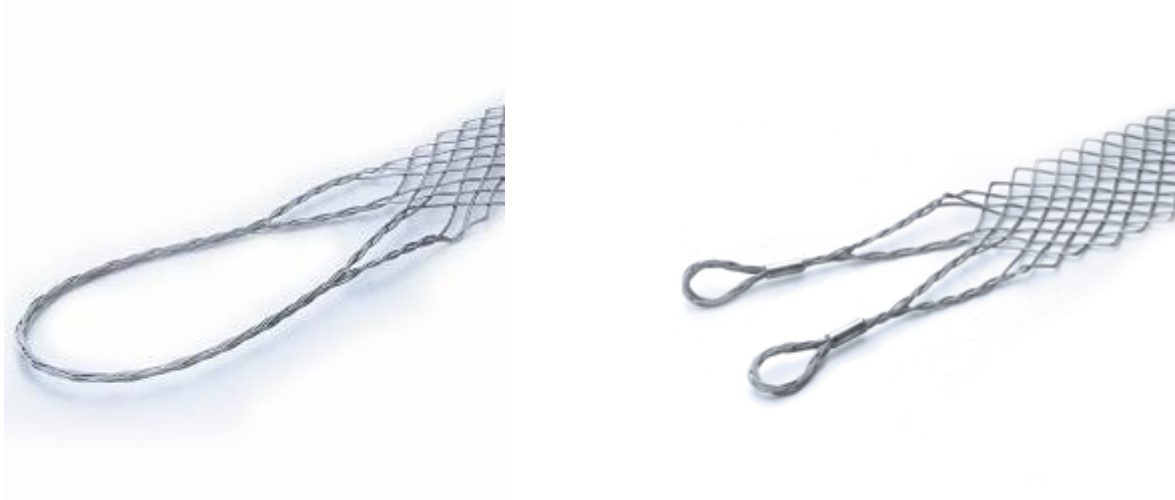

Code	Cable Diameter mm / Grip Length mm	Tensile Strength
ATMS1014	14-19 / 400	9 kN
ATMS1019	19-28 / 500	15kN
ATMS1028	28-40 / 600	24kN
ATMS1040	40-55 / 800	35kN
ATMS1055	55-75 / 900	62kN
ATMS1075	75-95 / 1000	98kN
ATMS1095	95-120 / 1200	133kN
ATMS1120	120-150 / 1400	187kN

Above table showing code numbers for single offset eye. Double eye grips have the same size and strength factors.